


**Required Items**

**T5 Trescent LED**



Part #	Description	Suggested List
L-LT54W-343WWH-5	T5 LED 4W 3000K White 13.5"	
L-LT54W-343CWH-5	T5 LED 4W 5000K White 13.5"	
L-LT54W-343DWH-5	T5 LED 4W 6500K White 13.5"	
L-LT54W-343WBL-5	T5 LED 4W 3000K Black 13.5"	
L-LT54W-343CBL-5	T5 LED 4W 5000K Black 13.5"	
L-LT54W-343DBL-5	T5 LED 4W 6500K Black 13.5"	
L-LT57W-571WWH-5	T5 LED 7W 3000K White 22.5"	
L-LT57W-571CWH-5	T5 LED 7W 5000K White 22.5"	
L-LT57W-571DWH-5	T5 LED 7W 6500K White 22.5"	
L-LT57W-571WBL-5	T5 LED 7W 3000K Black 22.5"	
L-LT57W-571CBL-5	T5 LED 7W 5000K White 22.5"	
L-LT57W-571DBL-5	T5 LED 7W 6500K Black 22.5"	
L-LT514W-904WWH-5	T5 LED 14W 3000K White 35.5"	
L-LT514W-904CWH-5	T5 LED 14W 5000K White 35.5"	
L-LT514W-904DWH-5	T5 LED 14W 6500K White 35.5"	
L-LT514W-904WBL-5	T5 LED 14W 3000K Black 35.5"	
L-LT514W-904CBL-5	T5 LED 14W 5000K Black 35.5"	
L-LT514W-904DBL-5	T5 LED 14W 6500K Black 35.5"	
L-LT518W-1204WWH-5	T5 LED 18W 3000K White 47.5"	
L-LT518W-1204CWH-5	T5 LED 18W 5000K White 47.5"	
L-LT518W-1204DWH-5	T5 LED 18W 6500K White 47.5"	
L-LT518W-1204WBL-5	T5 LED 18W 3000K Black 47.5"	
L-LT518W-1204CBL-5	T5 LED 18W 5000K Black 47.5"	
L-LT518W-1204DBL-5	T5 LED 18W 6500K Black 47.5"	

**90 Degree Adaptor**




15 mm  
9/16 in.

**Power Cord**

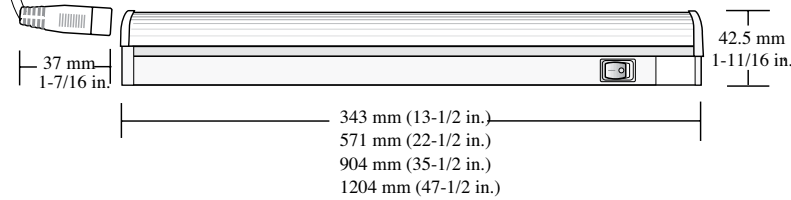


**Optional Items**

**Linking Cords**

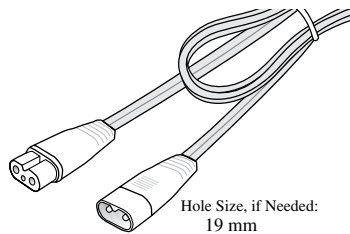

Part #	Description	Suggested List
L-LT5-LNK15-WH-1	15cm (6") White T5 LED Linking Cord	
L-LT5-LNK15-BL-1	15cm (6") Black T5 LED Linking Cord	
L-LT5-LNK25-WH-1	25cm (10") White T5 LED Linking Cord	
L-LT5-LNK25-BL-1	25cm (10") Black T5 LED Linking Cord	
L-LT5-LNK60-WH-1	60cm (24") White T5 LED Linking Cord	
L-LT5-LNK60-BL-1	60cm (24") Black T5 LED Linking Cord	
L-LT5-LNK120-WH-1	120cm (48") White T5 LED Linking Cord	
L-LT5-LNK120-BL-1	120cm (48") Black T5 LED Linking Cord	
L-LT5-LNK180-WH-1	180cm (72") White T5 LED Linking Cord	

**Hardwire Boxes**






Adapter cord is required for proper connection





Part #	Description	Suggested List
L-HWB-WH-T5-1	White LED Pockit T2 Hardwire Box w/o Switch	
L-HWB-WH-T5-S-1	White LED Pockit T2 Hardwire Box w/Switch	
L-HWB-BL-T5-1	Black LED Pockit T2 Hardwire Box w/o Switch	
L-HWB-BL-T5-S-1	Black LED Pockit T2 Hardwire Box w/Switch	
L-LT5-HWBADP-WH-1	T5 LED White Hardwire Box Adapter Cord	
L-LT5-HWBADP-BL-1	T5 LED Black Hardwire Box Adapter Cord	

**P/N:** L-LT54W-343C  
**Lamp Output:** 1 lamps, total fixture Lumens: 280  
**Max Candela:** 72.1 at Horizontal: 0°, Vertical: 2.5°  
**Input Wattage:** 4.1  
**Test Lab:** Intertek  
**Photometry:** Type C  
**CIE Class:** Direct  
**Cutoff Class:** Noncutoff

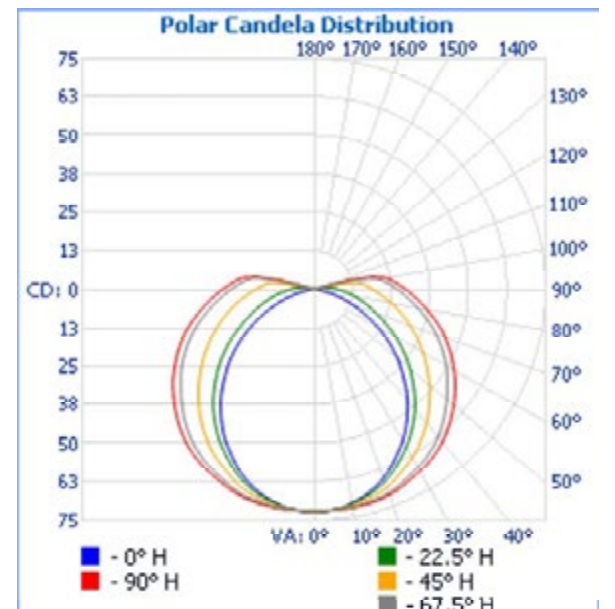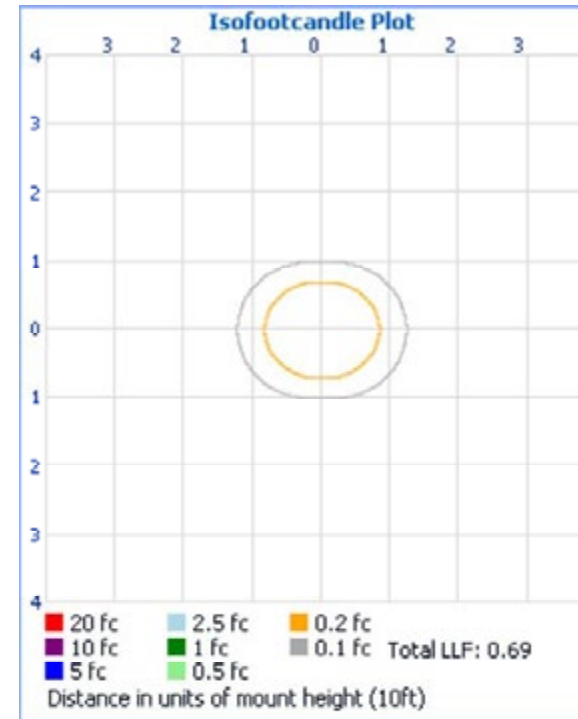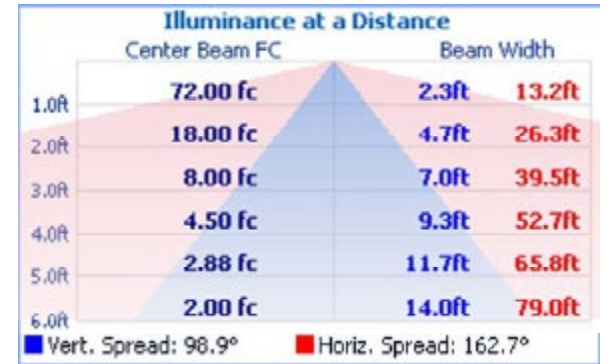



Coefficients Of Utilization - Zonal Cavity Method																								
Effective Floor Cavity Reflectance: 20%																								
RCC %:	80				70				50				30				10				0			
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0						
RCR: 0	1.17	1.17	1.17	1.17	1.14	1.14	1.14	0.93	1.07	1.07	1.07	1.01	1.01	1.01	0.95	0.95	0.95	0.93						
1	1.04	0.98	0.92	0.88	1	0.95	0.9	0.72	0.89	0.85	0.81	0.84	0.81	0.78	0.79	0.76	0.74	0.71						
2	0.93	0.84	0.76	0.69	0.9	0.81	0.74	0.59	0.76	0.7	0.65	0.72	0.67	0.62	0.68	0.64	0.6	0.57						
3	0.85	0.73	0.64	0.56	0.81	0.71	0.62	0.49	0.66	0.59	0.53	0.63	0.57	0.51	0.59	0.54	0.5	0.47						
4	0.77	0.64	0.54	0.47	0.74	0.62	0.53	0.41	0.59	0.51	0.45	0.55	0.49	0.43	0.52	0.47	0.42	0.39						
5	0.71	0.57	0.47	0.4	0.68	0.55	0.46	0.36	0.52	0.44	0.38	0.49	0.43	0.37	0.47	0.41	0.36	0.34						
6	0.65	0.51	0.41	0.35	0.63	0.5	0.41	0.31	0.47	0.39	0.33	0.45	0.38	0.32	0.42	0.36	0.31	0.29						
7	0.6	0.46	0.37	0.3	0.58	0.45	0.36	0.27	0.43	0.35	0.29	0.4	0.34	0.28	0.38	0.32	0.28	0.26						
8	0.56	0.42	0.33	0.27	0.54	0.41	0.32	0.24	0.39	0.31	0.26	0.37	0.3	0.25	0.35	0.29	0.25	0.23						
9	0.52	0.38	0.3	0.24	0.5	0.37	0.29	0.22	0.36	0.28	0.23	0.34	0.28	0.23	0.33	0.27	0.22	0.2						
10	0.49	0.35	0.27	0.22	0.47	0.35	0.27	0.2	0.33	0.26	0.21	0.32	0.25	0.21	0.3	0.24	0.2	0.18						

**P/N:** L-LT57W-571C  
**Lamp Output:** 1 lamps, total fixture Lumens: 407  
**Max Candela:** 109.4 at Horizontal: 0°, Vertical: 2.5°  
**Input Wattage:** 7.3  
**Test Lab:** Intertek  
**Photometry:** Type C  
**CIE Class:** Direct  
**Cutoff Class:** Noncutoff

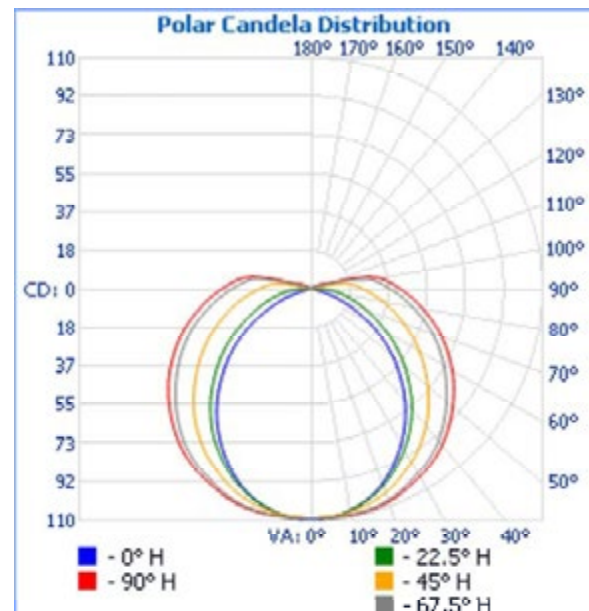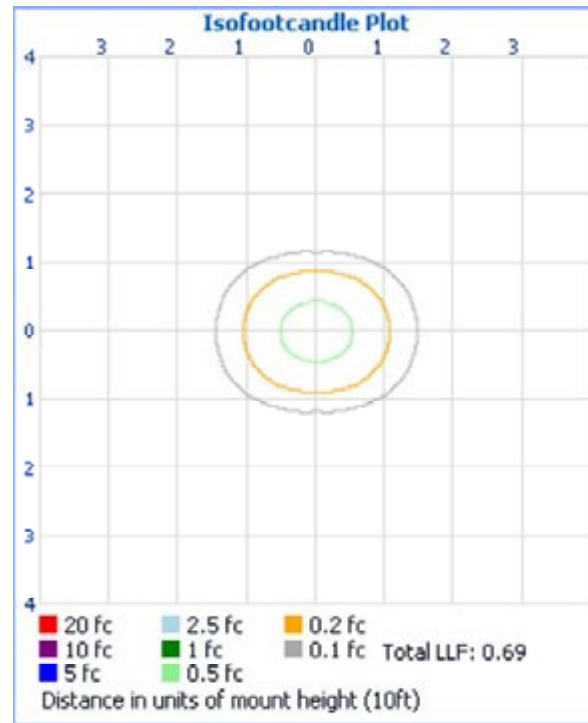




Coefficients Of Utilization - Zonal Cavity Method																						
Effective Floor Cavity Reflectance: 20%																						
RCC %:	80				70				50				30				10				0	
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	50	30	20	0	
RCR: 0	1.17	1.17	1.17	1.17	1.14	1.14	1.14	0.93	1.07	1.07	1.07	1.01	1.01	1.01	0.95	0.95	0.95	0.93				
1	1.04	0.98	0.93	0.88	1.01	0.95	0.91	0.73	0.9	0.86	0.82	0.84	0.81	0.78	0.8	0.77	0.75	0.72				
2	0.94	0.84	0.77	0.7	0.9	0.82	0.75	0.6	0.77	0.71	0.66	0.73	0.68	0.63	0.68	0.64	0.61	0.58				
3	0.85	0.73	0.64	0.57	0.82	0.71	0.63	0.5	0.67	0.6	0.54	0.63	0.57	0.52	0.6	0.55	0.51	0.48				
4	0.78	0.65	0.55	0.48	0.75	0.63	0.54	0.42	0.59	0.52	0.46	0.56	0.5	0.44	0.53	0.47	0.43	0.4				
5	0.71	0.57	0.48	0.41	0.68	0.56	0.47	0.36	0.53	0.45	0.39	0.5	0.43	0.38	0.48	0.42	0.37	0.35				
6	0.66	0.52	0.42	0.35	0.63	0.5	0.41	0.32	0.48	0.4	0.34	0.45	0.38	0.33	0.43	0.37	0.32	0.3				
7	0.61	0.47	0.37	0.31	0.59	0.45	0.37	0.28	0.43	0.36	0.3	0.41	0.34	0.29	0.39	0.33	0.29	0.26				
8	0.56	0.42	0.34	0.28	0.54	0.41	0.33	0.25	0.39	0.32	0.27	0.38	0.31	0.26	0.36	0.3	0.25	0.23				
9	0.53	0.39	0.3	0.25	0.51	0.38	0.3	0.23	0.36	0.29	0.24	0.35	0.28	0.23	0.33	0.27	0.23	0.21				
10	0.49	0.36	0.28	0.22	0.48	0.35	0.27	0.21	0.34	0.26	0.22	0.32	0.26	0.21	0.31	0.25	0.21	0.19				

**P/N:** L-LT514W-904C  
**Lamp Output:** 1 lamps, total fixture Lumens: 937  
**Max Candela:** 226.2 at Horizontal: 90°, Vertical: 10°  
**Input Wattage:** 11.3  
**Test Lab:** Intertek  
**Photometry:** Type C  
**CIE Class:** Direct  
**Cutoff Class:** Noncutoff

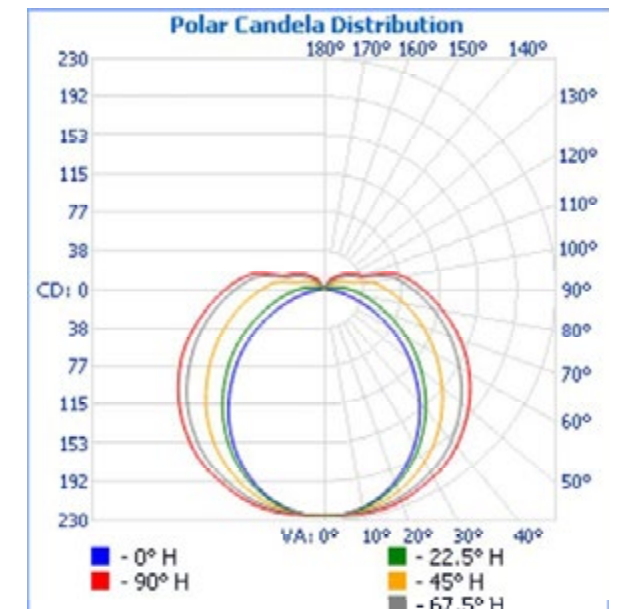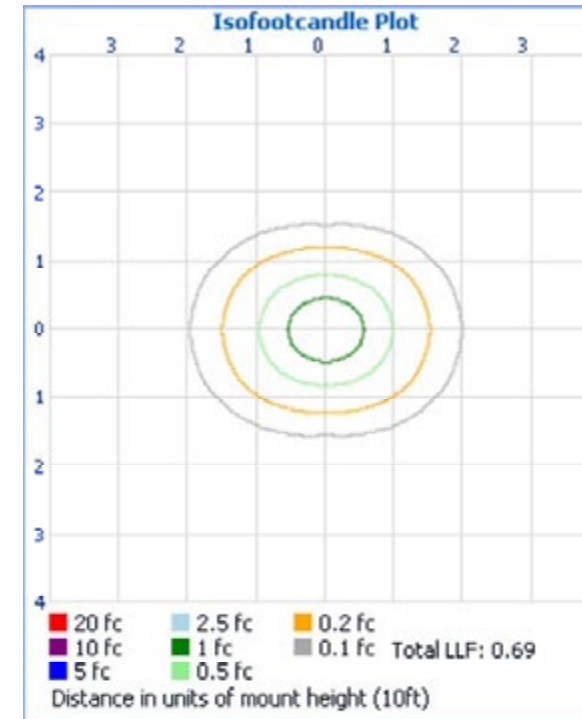

Coefficients Of Utilization - Zonal Cavity Method																						
Effective Floor Cavity Reflectance: 20%																						
RCC %:	80				70				50				30				10				0	
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	50	30	20	0	
RCR: 0	1.16	1.16	1.16	1.16	1.12	1.12	1.12	0.87	1.04	1.04	1.04	0.97	0.97	0.97	0.9	0.9	0.9	0.87				
1	1.03	0.97	0.92	0.87	0.99	0.93	0.88	0.68	0.87	0.83	0.79	0.81	0.77	0.74	0.75	0.72	0.7	0.67				
2	0.92	0.83	0.75	0.68	0.89	0.8	0.73	0.55	0.74	0.68	0.63	0.69	0.64	0.6	0.64	0.6	0.57	0.54				
3	0.84	0.72	0.63	0.56	0.8	0.69	0.61	0.46	0.65	0.58	0.52	0.6	0.54	0.49	0.56	0.51	0.47	0.44				
4	0.76	0.63	0.54	0.47	0.73	0.61	0.52	0.39	0.57	0.49	0.44	0.53	0.47	0.42	0.49	0.44	0.4	0.37				
5	0.7	0.56	0.47	0.4	0.67	0.54	0.45	0.33	0.51	0.43	0.37	0.47	0.41	0.36	0.44	0.39	0.34	0.32				
6	0.64	0.5	0.41	0.34	0.62	0.49	0.4	0.29	0.46	0.38	0.32	0.43	0.36	0.31	0.4	0.34	0.3	0.27				
7	0.6	0.46	0.36	0.3	0.57	0.44	0.36	0.26	0.41	0.34	0.28	0.39	0.32	0.27	0.36	0.31	0.26	0.24				
8	0.55	0.41	0.33	0.27	0.53	0.4	0.32	0.23	0.38	0.3	0.25	0.36	0.29	0.24	0.33	0.28	0.23	0.21				
9	0.52	0.38	0.29	0.24	0.5	0.37	0.29	0.21	0.35	0.28	0.23	0.33	0.26	0.22	0.31	0.25	0.21	0.19				
10	0.48	0.35	0.27	0.21	0.46	0.34	0.26	0.19	0.32	0.25	0.2	0.3	0.24	0.2	0.29	0.23	0.19	0.17				

**P/N:** L-LT518W-1204C  
**Lamp Output:** 1 lamps, total fixture Lumens: 1377  
**Max Candela:** 319.0 at Horizontal: 45°, Vertical: 2.5°  
**Input Wattage:** 16.1  
**Test Lab:** Intertek  
**Photometry :** Type C  
**CIE Class:** Direct  
**Cutoff Class:** Noncutoff

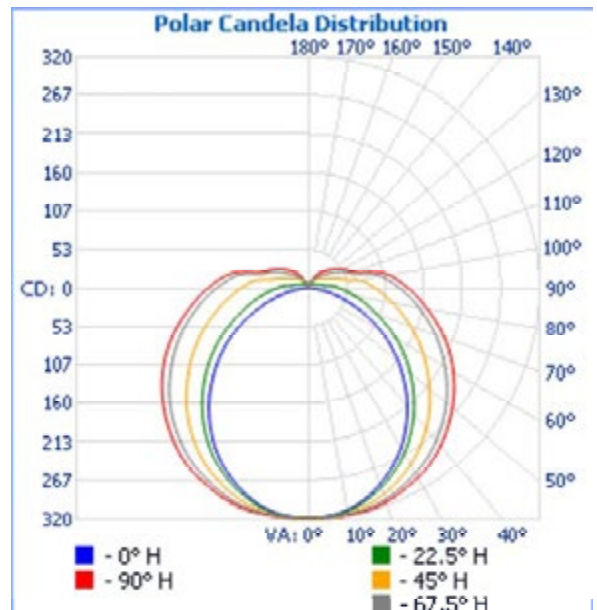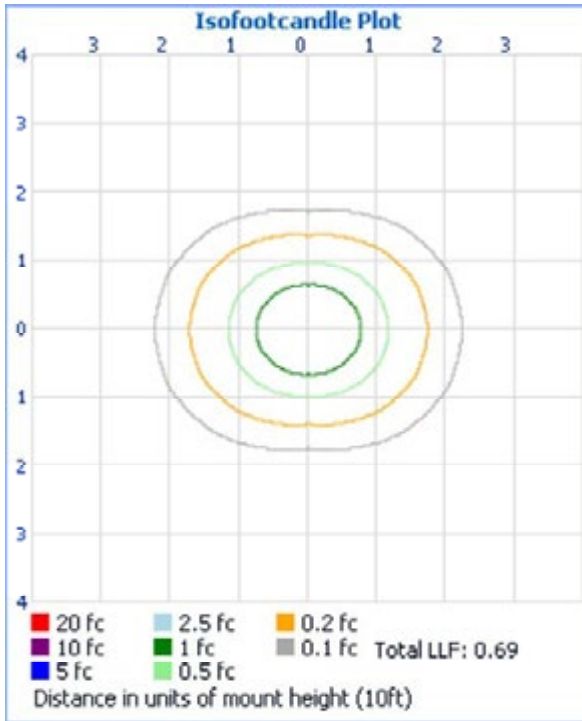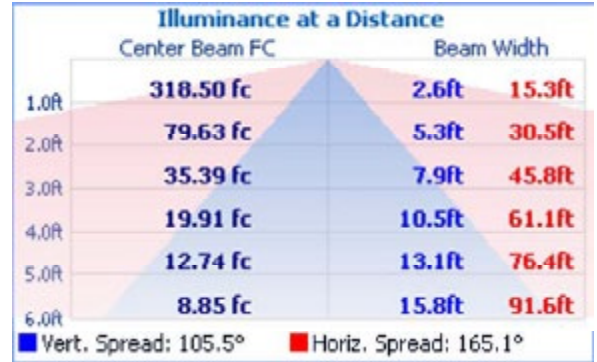

Coefficients Of Utilization - Zonal Cavity Method																		
Effective Floor Cavity Reflectance: 20%																		
RCC %:	80				70				50			30			10			0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.15	1.15	1.15	1.15	1.11	1.11	1.11	0.85	1.03	1.03	1.03	0.95	0.95	0.95	0.88	0.88	0.88	0.85
1	1.02	0.96	0.91	0.86	0.98	0.93	0.88	0.66	0.85	0.82	0.78	0.79	0.76	0.73	0.73	0.7	0.68	0.65
2	0.92	0.82	0.75	0.68	0.88	0.79	0.72	0.53	0.73	0.67	0.62	0.68	0.63	0.59	0.62	0.58	0.55	0.52
3	0.83	0.72	0.63	0.55	0.79	0.69	0.61	0.44	0.64	0.57	0.51	0.59	0.53	0.48	0.54	0.5	0.46	0.43
4	0.76	0.63	0.53	0.46	0.72	0.61	0.52	0.37	0.56	0.49	0.43	0.52	0.46	0.41	0.48	0.43	0.38	0.36
5	0.7	0.56	0.46	0.39	0.66	0.54	0.45	0.32	0.5	0.42	0.37	0.46	0.4	0.35	0.43	0.38	0.33	0.3
6	0.64	0.5	0.41	0.34	0.61	0.48	0.4	0.28	0.45	0.37	0.32	0.42	0.35	0.3	0.39	0.33	0.29	0.26
7	0.59	0.45	0.36	0.3	0.57	0.44	0.35	0.25	0.41	0.33	0.28	0.38	0.31	0.27	0.35	0.3	0.25	0.23
8	0.55	0.41	0.32	0.26	0.53	0.4	0.31	0.22	0.37	0.3	0.25	0.35	0.28	0.24	0.32	0.27	0.23	0.2
9	0.51	0.38	0.29	0.23	0.49	0.36	0.28	0.2	0.34	0.27	0.22	0.32	0.26	0.21	0.3	0.24	0.2	0.18
10	0.48	0.35	0.27	0.21	0.46	0.34	0.26	0.18	0.31	0.25	0.2	0.3	0.23	0.19	0.28	0.22	0.18	0.17